


BODINE


GEARMOTORS | MOTORS | CONTROLS **PRODUCT OVERVIEW**

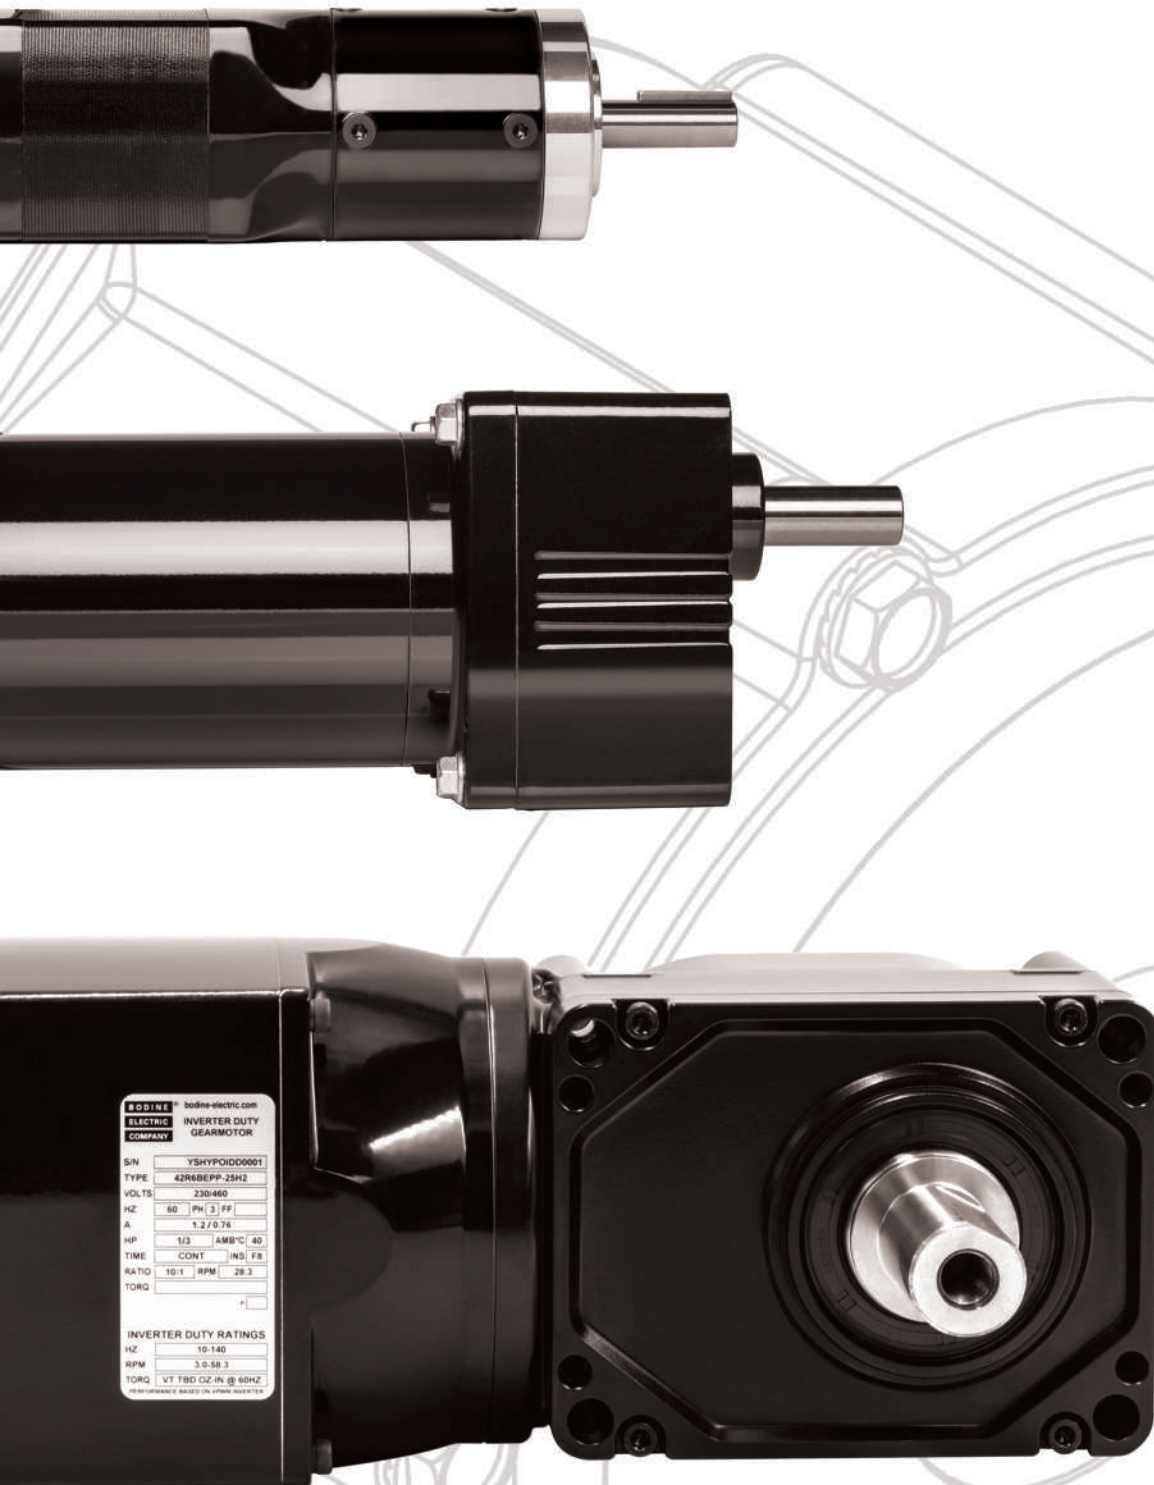

BODINE
ELECTRIC
COMPANY

bodine-electric.com

STANDARD PRODUCTS — (All Ratings Are for Continuous Duty Operation)



PARALLEL SHAFT GEARMOTORS

EXPLORE ►



AC Parallel Shaft



DC Parallel Shaft



BLDC Parallel Shaft

≤40 lb-in.

Type
30R-D



Type
24A-D



Type
22B-D



TYPE D Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

30R-D	1/25-1/17	7.4-40	9-142
-------	-----------	--------	-------

Fixed Speed AC (single-phase)

30R-D	1/50-1/30	3-40	3.8-285
-------	-----------	------	---------

Permanent Magnet DC

24A-D	1/29-1/17	3.3-40	5.6-417
-------	-----------	--------	---------

Brushless DC

22B-D	1/16	5.8-40	14-417
-------	------	--------	--------

≤120 lb-in.

Type
34R-Z



Type
24A-Z



Type
33A-Z



Type
22B-Z



TYPE Z Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

34R-Z	1/6	21-120	9-283
-------	-----	--------	-------

Fixed Speed AC (single-phase)

34R-Z	1/15	12-100	9.6-283
-------	------	--------	---------

Permanent Magnet DC

24A-Z (24/130V)	1/17	7-100	14-417
-----------------	------	-------	--------

24A-Z (90V/180V)	1/19 1/20	6-120	14-417
------------------	-------------	-------	--------

33A-Z (24/130V)	1/12	10-95	42-417
-----------------	------	-------	--------

33A-Z (90/130V)	1/7	19-120	42-417
-----------------	-----	--------	--------

Brushless DC

22B-Z	1/16-1/11	10-100	14-417
-------	-----------	--------	--------

≤210 lb-in.

Type
34R-WX



Type
34R-WX



Type
34B-WX



TYPE WX Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

34R-WX (115V)	1/7	9-210	5-447
---------------	-----	-------	-------

Fixed Speed (single-phase) AC

34R-WX	1/6	9-210	5-447
--------	-----	-------	-------

Permanent Magnet DC

33A-WX (12V)	1/11	9-205	2.9-237
--------------	------	-------	---------

33A-WX (24V)	1/4	9-205	8-658
--------------	-----	-------	-------

33A-WX (90V/180V)	1/7	9-205	8-658
-------------------	-----	-------	-------

33A-WX (130V)	1/7	9-205	8-658
---------------	-----	-------	-------

Brushless DC

34B-WX (24, 130V)	1/5	9-205	8-658
-------------------	-----	-------	-------

≤226 lb-in.

Type
24A-60P



Type
22B-60P



TYPE 60P (Planetary) Power (HP) Torque (lb-in.) Speed (rpm)

Permanent Magnet DC

24A-60P (12, 24, 90/130V)	1/23-1/11	4.6-226	11-658
---------------------------	-----------	---------	--------

Brushless DC

22B-60P (24, 130V)	1/8	11-226	15-658
--------------------	-----	--------	--------

≤350 lb-in.

Type
42R-FX



Type
48R-FX



Type
42A5-FX



Type
34B-FX



TYPE E, F and FX Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

34R-FX	1/6	28-350	5.7-340
--------	-----	--------	---------

42R-F	3/8	58-270	57-340
-------	-----	--------	--------

Fixed Speed AC (single-phase)

42R-FX	1/4	25-341	5.7-340
--------	-----	--------	---------

48R-FX	1/3	56-270	57-340
--------	-----	--------	--------

Permanent Magnet DC

42A-FX (12/24V)	1/7-3/8	43-350	3-500
-----------------	---------	--------	-------

42A-FX (90/130V)	3/16-3/8	31-350	6-500
------------------	----------	--------	-------

42A-FX (90/180V)	1/4	25-350	8.3-500
------------------	-----	--------	---------

Brushless DC

34B-E/F	1/5-1/4	28-350	8.3-500
---------	---------	--------	---------

≤1000 lb-in.

Type
48R-CG



Type
42A-CG



TYPE CG Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

48R-CG	3/4	220-1000	28-85
--------	-----	----------	-------

Permanent Magnet DC

42A-CG (24V)	7/16	220-660	38-115
--------------	------	---------	--------

42A-CG (130V)	7/16	190-580	42-125
---------------	------	---------	--------

≤1020 lb-in.

Type
42R-HG/H



Type
42R-HG



Type
42A-HG/H



Type
42A-HG



TYPE HG Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty), Hollow Shaft

42R-HG/H	3/8	294-1020	16-63
----------	-----	----------	-------

Variable Speed AC (three-phase, inverter-duty)

42R-HG	3/8	294-1020	16-63
--------	-----	----------	-------

Fixed Speed AC (single-phase)

42R-HG	1/5	155-621	16-63
--------	-----	---------	-------

Permanent Magnet DC, Hollow Shaft

33A-HG/H (12V)	1/5	104-416	23-93
----------------	-----	---------	-------

33A-HG/H (24V)	1/3	176-702	23-93
----------------	-----	---------	-------

33A-HG/H (90V)	1/4	131-524	23-93
----------------	-----	---------	-------

33A-HG/H (130V)	1/3	176-702	23-93
-----------------	-----	---------	-------

33A-HG/H (180V)	1/5	104-416	23-93
-----------------	-----	---------	-------

Permanent Magnet DC

33A-HG (24V)	1/3	170-680	23-93
--------------	-----	---------	-------

33A-HG (90/130V)	1/6 1/3	120-680	16-93
------------------	-----------	---------	-------

GEARMOTORS FOR HAZARDOUS LOCATIONS

≤350 lb-in.

Type
34B/SR-WX



Type
34R-FX
CI/D2



Types
34R-FX,
34B-FX
CI/D1



Types
34R, 34B
CI/D1
(motor)



TYPE WX and FX Power (HP) Torque (lb-in.) Speed (rpm)

Class I Division 2 INTEGRA BLDC

34B/SR-WX (12, 24VDC)	1/5-1/4	9-205	8-658
-----------------------	---------	-------	-------

CI/ D2 Variable Speed AC (three-phase, inverter-duty)

34R-FX (230/460VAC)	1/6	28-350	5.3-320
---------------------	-----	--------	---------

Class I Division 2 Fixed Speed AC (single-phase)

34R-FX (115VAC)	1/7	24-350	5.7-340
-----------------	-----	--------	---------

CI/D1 Variable Speed AC (three-phase, inverter-duty)

34R-FX (230, 460VAC)	1/4	46-350	5.3-320
----------------------	-----	--------	---------

Class I Division 1 BLDC

34B-FX (12, 24VDC)	0.47, 0.60	58-350	7.3-560
--------------------	------------	--------	---------

CI/D1 Variable Speed AC (3-ph, inverter-duty) Motors w/o Gearing

34R (230, 460VAC)	1/4	9.9	1600
-------------------	-----	-----	------

Class I Division 1 BLDC Motors without Gearing

34B (12, 24VDC)	0.47, 0.66	13.4, 14.8	2200, 2800
-----------------	------------	------------	------------



RIGHT ANGLE GEARMOTORS

EXPLORE ▶



AC Right Angle



DC Right Angle



BLDC Right Angle

≤37 lb-in.



TYPE 3N and 3F Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

30R-3N	1/17	8-37	28-340
--------	------	------	--------

Fixed Speed AC (single-phase)

34R-3F	1/15	16-37	28-170
--------	------	-------	--------

Permanent Magnet DC, Hollow Shaft

24A-3F/H (24V)	1/13	6.8-14	250-500
----------------	------	--------	---------

24A-3F/H (90/130V)	1/23 1/11	5.5-37	29-500
--------------------	-------------	--------	--------


Permanent Magnet DC

24A-3F 24 or 130V	1/17	5.2-22	42-500
----------------------	------	--------	--------

Brushless DC

22B-3N	1/8	11-37	42-500
--------	-----	-------	--------

≤148 lb-in.



TYPE 3RD Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

30R-3RD	1/25-1/17	95-148	0.5-8.5
---------	-----------	--------	---------

Fixed Speed AC (single-phase)

30R-3RD	1/30-1/27	88-148	0.4-7.8
---------	-----------	--------	---------

Permanent Magnet DC

24A-3RD (24/130V)	1/29-1/17	92-147	0.7-12.5
-------------------	-----------	--------	----------

Brushless DC

22B-3RD	1/16-1/8	95-147	0.7-12.5
---------	----------	--------	----------

≤179 lb-in.



TYPE 5N, 5R and 5L Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty), Hollow Shaft

42R-5L/H	3/8	54-121	23-340
----------	-----	--------	--------

Variable Speed AC (three-phase, inverter-duty)

42R-5N	3/8	54-121	23-340
--------	-----	--------	--------

Fixed Speed AC (single-phase)

34R-5R	1/15	18-33	28-170
--------	------	-------	--------

42R-5N	1/6 1/4	23-113	38-340
--------	-----------	--------	--------

42R-5L	1/8	31-77	43-170
--------	-----	-------	--------

Permanent Magnet DC, Hollow Shaft

33A-5L/H (90/130V)	1/8 1/4	17/22-84/109	43/62-345/500
--------------------	-----------	--------------	---------------

33A-5L/H (90/180V)	1/7	14-101	33-500
--------------------	-----	--------	--------

Permanent Magnet DC

33A-5R (130V)	1/12	17-45	50-200
---------------	------	-------	--------

33A-5L (130V)	1/6	37-77	50-200
---------------	-----	-------	--------

42A-5L (130V)	1/6	37-117	33-200
---------------	-----	--------	--------

42A-5N (12/24V)	3/16 7/16	43-109	25-200
-----------------	-------------	--------	--------

42A-5N (12/24V)	7/16	43-109	62-500
-----------------	------	--------	--------

42A-5N (90/130V)	3/16 1/4	24-109	45-500
------------------	------------	--------	--------

42A-5N (90/130V)	1/4	24-109	62-500
------------------	-----	--------	--------

Brushless DC

34B-5N (24/130V)	1/5-3/8	18.6-109	62-500
------------------	---------	----------	--------

34B/FV-5N	1/4	24-104	63-500
-----------	-----	--------	--------

≤296 lb-in.

Type 48R-5H



Type 42R-5H

≤121 lb-in.

Type 34R-5F



Type 33A-5F

≤380 lb-in.

Type 42R-GB/H



Type 42R-GB



Type 33A-GB, 33A-GB/H



Type 42A-GB



TYPE 5H Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty)

48R-5H	3/4	178-296	35-170
--------	-----	---------	--------

Permanent Magnet DC

42A-5H Single Shaft	1/3	52-189	52-189
---------------------	-----	--------	--------

42A-5H Single Shaft	1/2	71-264	52-250
---------------------	-----	--------	--------

TYPE 5F Power (HP) Torque (lb-in.) Speed (rpm)

Fixed Speed AC (single-phase)

34R-5F (50/60Hz)	1/9	19/16 to 121/102	19/23 to 280/340
------------------	-----	------------------	------------------

Permanent Magnet DC

33A-5F (24, 130V)	1/8	11-55	62-500
-------------------	-----	-------	--------

TYPE GB Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty), Hollow Shaft

42R-GB/H	3/8	230-380	6-28
----------	-----	---------	------

Variable Speed AC (three-phase, inverter-duty)

42R-GB	3/8	230-380	6-28
--------	-----	---------	------

Fixed Speed AC (single-phase), Hollow Shaft

42R-GB/H	1/6	290-380	5.9-14
----------	-----	---------	--------

Fixed Speed AC (single-phase)

42R-GB (115V)	1/6	209-380	5.9-28
---------------	-----	---------	--------

42R-GB (230/460V)	1/4	230-380	5.9-28
-------------------	-----	---------	--------

Permanent Magnet DC, Fixed or Hollow Shaft

33A-GB (90V)	1/4	151-380	6.2-29
--------------	-----	---------	--------

33A-GB (130V)	1/8	200-380	8.9-42
---------------	-----	---------	--------

Permanent Magnet DC

42A-GB	1/4	213-380	8.9-42
--------	-----	---------	--------

≤638 lb-in.

Type 56R1-50JW/H



≤2370 lb-in.

Types 42R-30H3 and 42R-25H2



Types 42B-30H3 and 42B-25H2



Types 33A-30H3 and 33A-25H2



Stainless Steel Power (HP) Torque (lb-in.) Speed (rpm)

Variable Speed AC (three-phase, inverter-duty), Hollow Shaft

56R1-50JW/H	1/2	158-638	29-176
-------------	-----	---------	--------

HYPLOID Power (HP) Torque (lb-in.) Rated/Max Speed (rpm)¹

Variable Speed AC (three-phase, inverter-duty), Hollow Shaft

42R-30H3	1/3	776-2328	7-21
----------	-----	----------	------

42R-25H2	1/3	53-589	28-340
----------	-----	--------	--------

Brushless DC

42B-30H3	1/2	977-2370	8-25
----------	-----	----------	------

42B-25H2	1/2	66-703	33-400
----------	-----	--------	--------

PMDC Hypoid Gearmotors

33A-25H2 (12V)	1/5	20-220	42-500
----------------	-----	--------	--------

33A-25H2 (24V)	1/3	35-390	42-500
----------------	-----	--------	--------

33A-25H2 (130V)	1/3	35-390	42-500
-----------------	-----	--------	--------

33A-25H2 (90V)	1/4	25-285	42-500
----------------	-----	--------	--------

33A-25H2 (180V)	1/5	20-220	42-500
-----------------	-----	--------	--------

33A-30H3 (12V)	1/5	290-865	10-31
----------------	-----	---------	-------

33A-30H3 (24V)	1/3	510-1535	10-31
----------------	-----	----------	-------

33A-30H3 (130V)	1/3	510-1535	10-31
-----------------	-----	----------	-------

33A-30H3 (90V)	1/4	375-1120	10-31
----------------	-----	----------	-------

33A-30H3 (180V)	1/5	290-865	10-31
-----------------	-----	---------	-------

¹ Twelve gear ratios from 5:1 to 240:1



MOTORS

EXPLORE ►



AC Motors



DC Motors



BLDC Motors


AC



PMDC



BLDC



Power (HP) Torque (oz-in.) Speed (rpm)

Variable Speed AC (3-ph, inverter-duty) and PSC

30R	1/25 - 1/17	24-35	1700
34R	1/8 - 1/4	70-148	1700, 1800
42R	3/8	222	1700
48R	1/3 - 3/4	185-445	1700, 1800

Fixed Speed AC (single-phase)

K-2	1/1600-1/200	0.35-3.2	1200, 1550, 1800, 3600
30R	1/40 - 1/30	10-20	1700, 1800, 3400
34R	1/15-1/5	38-119	1700, 1800, 3400
42R	1/12-1/4	48-148	1700, 1400, 3450
48R	1/3-1/2	185-296	1400, 1700, 1800

Permanent Magnet DC

24A	1/50 - 1/7	8-24	2500-11,500
33A (24V)	1/16 - 1/3	34-134	2500
33A (90/130V)	1/16-1/3	36-134	1725, 2500
33A (130V)	1/12-1/8	34-50	2500
42A	1/4-1/2	101-180	2500

Brushless DC

22B	1/16-1/5	20-50	2500-10,000
34B	1/5-3/8	33-151	2500-10,000



SPEED CONTROLS

EXPLORE ►



AC Inverters



DC Controls



BLDC Controls

Power (HP) Input (VAC) Input (VDC) Output (VDC) Output (Amps)

AC Inverter Speed Control

Chassis / IP-00	1/2-1	115-230	—	230	2.4-4
NEMA-1 / IP-40	≤1	115	—	230	3.6
NEMA-4X / IP-65	≤1	115	—	230	3.6

DC Speed Controls

Filtered PWM	7/16-1/16	115	—	≤130	1.25-5
Filtered PWM Speed / Direction	≤7/16	115	—	130	7.1
Filtered SCR	1/17-1/3	130	—	130	0.5-4.6
Filtered SCR (Remote)	1/17-1/3	115	—	130	0.5-2.3
Unfiltered SCR	≤1/5	115	—	90	≤4.2
Unfiltered SCR NEMA-4 @90V	≤1/5	115	—	0-90	≤4.2
Unfiltered SCR NEMA-4 @180V	≤1/3	230	—	0-180	≤4.2
Filtered PWM	7/16-1/6	115	—	130	1.25-5
Low-Voltage PWM	1/6-1/3	14-35	—	12-24	14-35
Unfiltered SCR	1/3	230	—	180	2.1-4.2

BLDC Speed Controls

Low Voltage	1/4-3/8	—	12-24 or 24-35	12 or 24	18-30
Low Voltage (120° Commutation)	≤3/8	—	24-35	24	18
24V PWM	1/6-3/8	—	35	24	10-30
Enclosed Filtered SCR	1/3-3/8	115	—	130	3-6
Filtered SCR	1/3-3/8	115	—	130	3-6
Unfiltered SCR	3/8	115	—	90	3-6
12V PWM	1/4	14	—	12	20-30

AC Enclosed



DC Enclosed



DC Chassis



BLDC Chassis



OVER 1500 STANDARD GEARMOTORS, MOTORS AND CONTROLS

AC Products AC gearmotors and AC motors are an economical, efficient and simple-to-use choice for fixed speed or variable-speed (inverter-duty) velocity control applications.

DC Products Permanent magnet DC gearmotors and DC motors provide quick acceleration, deceleration, and reversing as well as high starting torque.

Brushless DC Products Brushless DC gearmotors and motors deliver quick acceleration and deceleration, high peak torque, and maintenance-free performance.

Speed Controls Bodine AC, DC and BLDC speed controls are designed to provide maximum performance from our motors and gearmotors.

FOR 2D/3D CAD DRAWINGS AND MORE, BODINE-ELECTRIC.COM



Get the latest product specifications, technical documents, connection diagrams and instruction manuals. Dimension drawings and 3D models can be imported from the website directly into most CAD software programs.

DRIVING OUR CUSTOMER'S SUCCESS



From our first motor in 1905 to today's solar powered solutions for the energy industry, Bodine has helped customers in many industries solve application challenges, develop gearmotor and drive solutions, and deliver high-quality products.

INDUSTRIES AND APPLICATIONS

PACKAGING AND LABELING

We supply rugged, high-performance gearmotor solutions to many leading OEMs in the packaging industry. Bodine offers over 1,400 standard products with gear ratios from 4:1 to 3600:1, torque to 1535 lb-in (174Nm) and horsepower up to $\frac{3}{4}$ hp (560W). Most gear motors are available with either AC, PMDC or Brushless DC (EC) windings.

LOW VOLTAGE & SOLAR POWER

Bodine low-voltage gearmotors, motors and controls are designed with battery and solar power use in mind. Whether it is agricultural equipment, a warehouse automation robot (AGV/AMR), a portable medical device, or a chemical injection pump in a remote gas or oil field, we'll deliver the performance you need..

MEDICAL AND LABORATORY

Bodine gearmotors drive everything from complex diagnostic machinery, patient lifts and beds, to medical stirrers and centrifuges. Our gearmotors, motors and controls provide efficient and reliable power for a wide range of medical and lab applications.

INDUSTRIAL AUTOMATION / CONVEYORS



Whether you need the maintenance-free performance of variable-speed AC 3-phase, Inverter-Duty gearmotors, the high starting torque of a PMDC geared motor, or a combination of both with our brushless DC products, we have the right drive solution for your industrial automation or conveyor application.

CHEMICAL PROCESS, OIL & GAS

Bodine offers a large selection of CI/D1 (IP-66) and CI/D2 (IP-44) gearmotors and motors for hazardous locations with AC inverter-duty, PSC, and Low-Voltage Brushless DC (12V or 24V) windings, including a family of BLDC INTEGRA gearmotors with built-in speed controls for remote or off-grid operation (IP-44).

FOOD EQUIPMENT

From pizza conveyor ovens, to pita bread production, from commercial hamburger ovens to mixers, pumps and filling stations, Bodine has a long and successful history in many food processing applications. We offer several AC, BLDC and PMDC models that are IP-66 rated and can withstand moisture, grime and water jets.

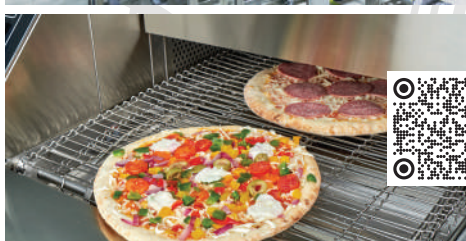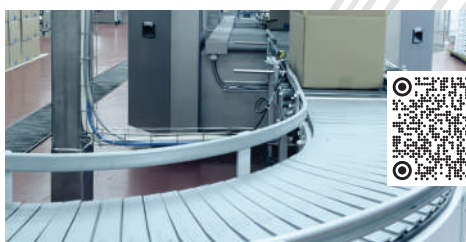

VARIABLE SPEED AC INVERTER-DUTY 3-PHASE GEARMOTORS




Get maintenance-free performance with our Inverter-Duty, three-phase gearmotors. Designed to drive demanding applications like conveyor systems, food processing equipment, medical equipment and factory automation. Parallel shaft, hollow shaft and right-angle gearmotors are rated from 1/25-3/4HP, with gear ratios from 5:1 to 3600:1, and rated torque up to 1000 lb-in (113 Nm). Dual voltage (230/460 VAC) stock models are available.

SIMPLIFY YOUR DESIGN WITH HOLLOW SHAFT GEARMOTORS



Hollow shaft gearmotors optimize mounting space, simplify installation, and reduce the number of component parts. They can be connected directly to the driven load eliminating expensive shaft couplings and mounting hardware that can be unsafe, bulky, and present alignment issues. Various single and dual drive insert shafts and mounting bases are also available for maximum design flexibility.



bodine-electric.com

201 Northfield Road
Northfield, IL 60093 U.S.A.
Tel: 773.478.3515
www.bodine-electric.com
info@bodine-electric.com

